

Automatic road
barriers
for passages
of up to
7.6 m / 24.9 ft




SAFE & SECURE SYSTEMS LTD
PROTECTING & ENHANCING YOUR PROPERTY

new Gard8

A new concept of automatic barrier

Innovation and design for all-inclusive safety: these are the most recent additions to the Gard barrier line family. Soft contours and rounded corners to counteract the "sail effect" for a barrier that incorporates perfectly into a diversity of installation settings.




Gard8

230V 24V

Automatic road barriers

Designed for a range of large openings up to 7,6 m / 24.9 ft, the new Gard barriers are the ideal solution for control of roads and parking areas for industrial and public use.

The Gard series is available in the 110V/230V A.C. motor and the 24V D.C. motor versions.

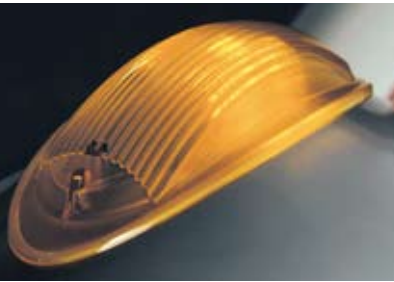

A blend of design and modern technology of illumination.

The exclusive incorporated flashing light with a lighted LED diffuser needs no special maintenance and ensures complete visibility of the warning light.



The protective guard on the bar is a standard feature.


Protects the user from possible risk when the bar is in rotation.



Perfectly integrable.

The safety photocells are applied directly onto the bar and integrate harmoniously and aesthetically with the system.

The new series offers many new features, all marked by innovation

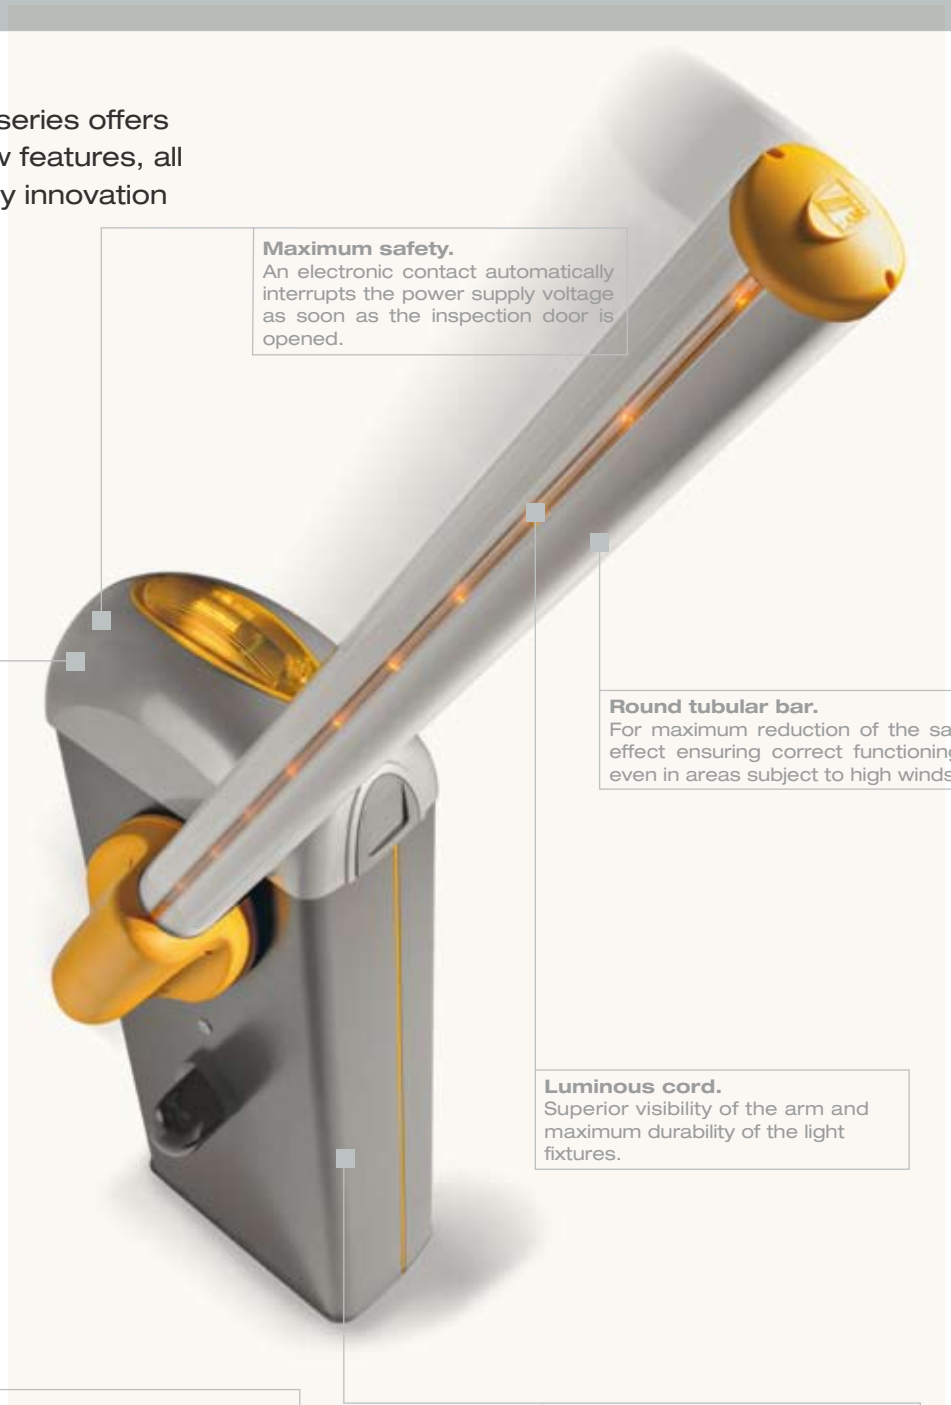

Maximum safety.
An electronic contact automatically interrupts the power supply voltage as soon as the inspection door is opened.

Round tubular bar.
For maximum reduction of the sail effect ensuring correct functioning even in areas subject to high winds.

Luminous cord.
Superior visibility of the arm and maximum durability of the light fixtures.

Command electronics.
Protected by a die-cast aluminium guard, it is positioned to make any type of intervention extremely practical.

Differentiated sensitivity spring.
For exceptional balancing of the bar.



The 230V electronics

The Gard series barriers are constructed with next-generation electronics that guarantee total control of the automatic system, improving and increasing the usual safety and control functions, such as:

- > **Comprehensive AUTOTEST of all the safety devices**
connected to the system prior to activating the motor (electronic autotest).
- > **Electronic control of the movement**
of the bar with obstacle detection (anti-crushing function).
- > **Safety feature even when the bar is stationary**
all controls are invalidated if an obstacle is detected by the safety devices.

The advantages of 24V barriers

Streets, parking areas, collective areas or simply specific functional and security needs of the system can call for the use of a Gard system with 24V technology.

> Frequent blackouts

The electronics of a Gard 24V system automatically recognizes a lack of power and activates emergency operation with special auxiliary batteries.

> Keep speed in check

For total service, the 24V electronics enables the operating speed to be adjusted depending on whether the situation requires faster or slower openings and closings.

> Intensive traffic

The low-voltage motor ensures operation of the barrier for intensive traffic conditions, such as streets, parking areas and other areas entailing constant, intensive operation.

> Rapid transit

The 24V technology regulates the barrier opening time between 8 and 4 seconds.



Also available as a set or with synchronous action

Thanks to the additional RSE card the barriers can be installed facing each other or be synchronised with the "compass" function at the same access point.



Global entry control

The Gard series automatic barrier system can be connected to many of the Came access control systems that allow identification, memorization, and entry and exit only to authorized personnel. The equipment can also be integrated with a global access control system for specific departments in a company or the services offered by a collective structure and apartment blocks.



PRODUCTS



Made in Italy



For its quality processes management Came Cancelli Automatici is ISO 9001:2000 certified, and for its environmental management it is ISO 14001 certified. Came designs and manufactures entirely in Italy.



CAME

Approved
Installer



SAFE & SECURE SYSTEMS LTD
PROTECTING & ENHANCING YOUR PROPERTY

The range

230V A.C. Barriers

G2081 Automatic barrier in galvanized and painted steel with 230V A.C. operator complete with control panel.

G2081I Automatic barrier in brushed AISI 304 stainless steel with 230V A.C. operator complete with control panel.

230V A.C. Electronics

ZG5 Plus control panel.

ZG6 Basic control panel.

RSE Function management control board for ZG5.

24V D.C. Barriers

G2080 Automatic barrier in galvanized and painted steel with 24V D.C. operator complete with control panel.

G2080I Automatic barrier in satin-finish AISI 304 stainless steel with 24V D.C. operator complete with control panel.

24V D.C. Electronics

ZL38 Control board fitted to take Came radio frequency cards.

LB38 Emergency battery card.

Technical features

Type	G2081 / G2081I	G2080 / G2080I
Protection rating	IP54	IP54
Power supply (V)	230 A.C 50/60 Hz	230 A.C 50/60 Hz
Motor power supply (V)	230 A.C 50/60 Hz	24 D.C.
Power (W)	330	300
Current draw (A)	2,8	15
Reduction ratio (i)	1/202	1/202
Max torque (Nm)	250	600
Opening time (s)	8	4 ÷ 8
Duty cycle (%)	30	intensive use
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55
Cabinet colour	Grey textured metal finish 0530837	Grey textured metal finish 0530837
Cover colour	RAL 9006	RAL 9006

● 230V A.C. ● 24V D.C.

General information

Composition of the bar	Max opening clearance	m	ft
Bar		7.6	24.9
Bar with mobile support		7	23
Bar with luminous cord		7.6	24.9
Bar with luminous cord and mobile support		7	23
Bar with rack		7	23
Bar with rack and luminous cord		7	23

Dimensions



Safe & Secure Systems
Unit 5, Gracious Farm
High Street
Southill
Bedfordshire
SG18 9JB

Telephone:

01462 816571

Mobile:

07748 365912

www.safesecuresystems.com

The data and information shown in this catalogue are subject to change without the obligation to give prior notice by Came cancelli automatici S.p.A.